





PRODUCT SPECIFICATIONS

Soft Team Pod (Small)

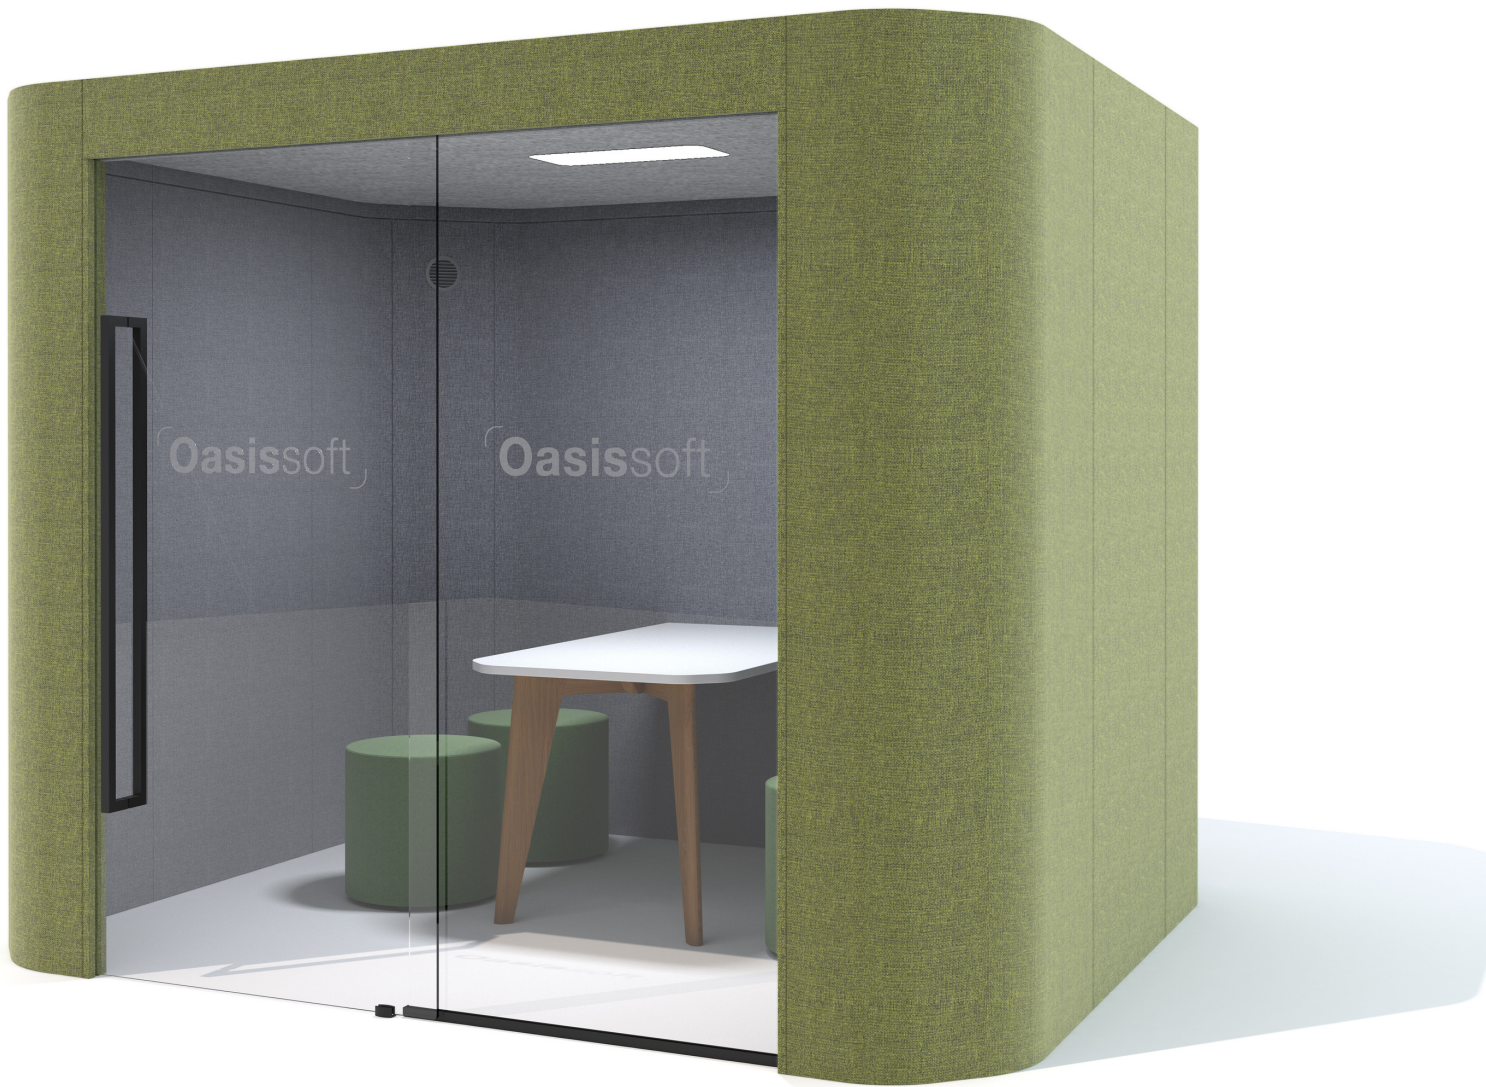

MADE IN THE USA

SOFT TEAM POD (SMALL) PRODUCT SPECIFICATIONS

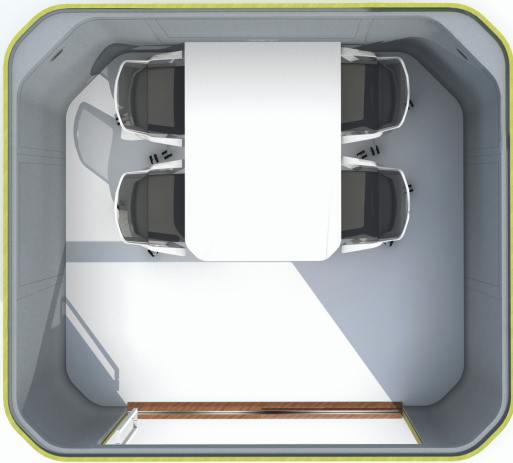

STANDARD FEATURES

External dimensions: 112" w x 100" d x 89" h

Internal dimensions: 106" w x 94" d x 83" h

69.2 square feet interior space

Door: Right Hand (slides to the right)

Weight: 2,000 lbs

Est. installation time: 2 people x 4 hours (multiple units can be installed at a reduced time per unit)

Exterior Panels (12 fabric colors)

Interior Panels (12 fabric colors)

Occupancy sensor

Enclosed acoustic fleece ceiling with sprinkler knock out

2 adjustable air circulation fans (10-28 air changes per hour)

2 adjustable LED ceiling light panels (2,200 lumens)

Power source: 12-ft corded 3-prong UL Listed plug

Leveling glides

ADA Compliant

Unit sits on existing floor with 1/2" threshold

32" clear door opening

Unit allows for 60" wheelchair turning

radius with 32" w x 42" d seated height

pedestal table or other appropriate client-

supplied furniture

AVAILABLE OPTIONS

Left hand door (slides to the left)

Louvre ceiling w/LED tape lighting

32" glass panel (L, R, or both)

Pedestal table (32" x 55")

Oak frame table (32" x 55")

TV wall mount (up to 55" & 77 lb. monitor)

15' HDMI cable

Cove 2 power + 2 USB

Cove RJ 2 power + 2 USB + HDMI

Seismic kit



OASIS BERCO SOFT PODS ARE "PLUG & PLAY"

An Advanced Power Strip (APS) comes installed in the corner of your Soft Team Pod. ALL electrical components (occupancy sensor, fan, LED light, power/USB unit) plug directly into this unit, then the 12' cord from the APS runs from the corner panel through the inside of the side wall and out through a grommet, leaving about 6' of cord to plug into your standard 120v wall outlet.

ETL LISTED TO CONFORM TO UL STD 962

